

PROFILE DIMENSIONS

Width [S]	Closure width [Z]	Height [h]
20,00 mm ± 1,00 mm	6,80 mm ± 0,50 mm	2,00 mm ± 0,10 mm

REEL DIMENSIONS

Reel type	B	
Outer diameter	500 mm	
Inner diameter	200 mm	
Core diameter	40,4 mm	
Reel width	394 mm	

PACKING INFORMATION

Length/Reel		1500 m	4 921,26 ft
Reels/Pallet		24	
Length/Pallet		36000 m	118 110,24 ft
Reel weight		29,9 kg ± 6%	65,8 lb ± 6%
Pallet size	Length	1200 mm	
	Width	1050 mm	
	Height	2200 mm	

SEALING PROPERTIES


Temperature range:	105 °C - 180 °C*	221 °F - 356 °F*
--------------------	------------------	------------------

*Temperature range can vary depending on type of packaging material used and sealing time.

RECOMMENDED STORAGE CONDITIONS

Temperature	15 - 25 °C	59 - 77 °F
Humidity	35 - 65%	

EL-ZIP® H20-2CR

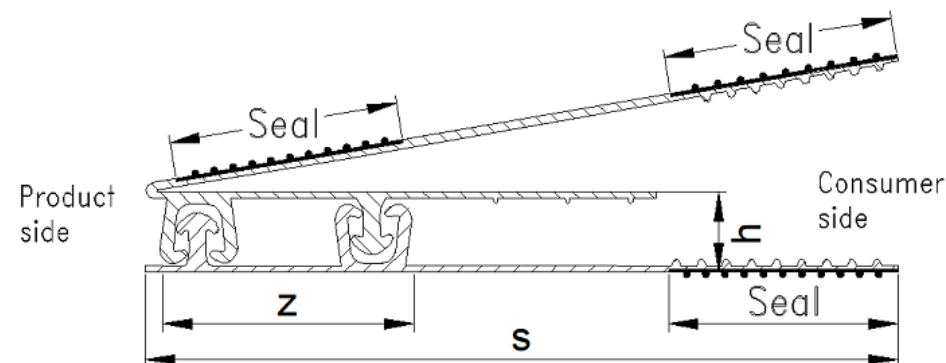

The drawing is a pictorial representation and is not intended to be dimensionally accurate.

GENERAL INFORMATION

Zipper material(s): PE blend with sealing layers and ribs.

Application: Horizontal and vertical packaging machines and bag making machines.

The goods should be stored in a clean, dry and free from infestation, hygienic environment and not exposed to direct sunlight.

12 months warranty (on FIFO basis).

Conditioning time in the packaging area before processing: min: 24 hours.

Approved by
Sylwester Szatański



R&D Supervisor

2023-03-13

Version: 5

The manufacturer reserves the right to change the content of the specification.

Issued date: 2023-01-24